


RESTORE SURFACE PER APPLICABLE CITY OF REDMOND STANDARDS

8" WIDE CAUTION TAPE

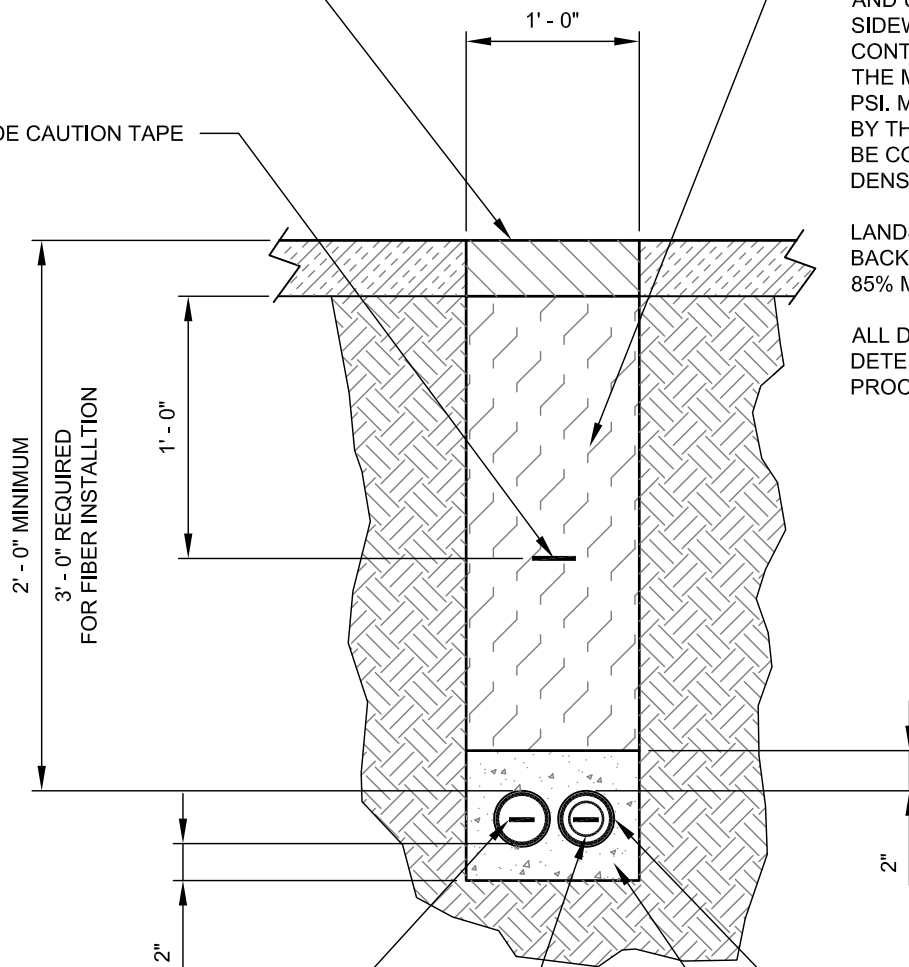

PER CITY OF REDMOND STANDARD DETAIL 201, BACKFILL WITHIN PAVED CITY STREETS, DRIVEWAYS AND UNDER CURB GUTTER AND SIDEWALKS, WILL CONSIST OF CONTROL DENSITY FILL (CDF) WITH THE MAXIMUM STRENGTH OF 150 PSI. MIX DESIGN TO BE APPROVED BY THE CITY, OR BACKFILL SHALL BE COMPACTED TO 95% MAXIMUM DENSITY IN 6 INCH MAXIMUM LIFTS

LANDSCAPED AREAS SHALL BE BACKFILLED AND COMPACTED TO 85% MAXIMUM DENSITY IN 12" LIFT

ALL DENSITIES SHALL BE AS DETERMINED BY MODIFIED PROCTOR (ASTM D1557)

DETECTABLE PULL TAPE

FLEXIBLE INNERDUCT (SEE PLANS FOR SPECIFIC LOCATIONS)

NEW CONDUIT (SEE PLANS FOR SIZE)

SAND

TRENCH RESTORATION

NTS

CITY OF REDMOND, WASHINGTON			STANDARD DETAILS	
APPROVED BY: RON GRANT CITY ENGINEER			TRENCH RESTORATION FOR 1 OR 2 CONDUITS	
REVISION DATE: MARCH 01, 2010			FILE NAME: SD466.DWG	DETAIL NUMBER: 466