NOT TO SCALE

CURB RETURN DRIVEWAY

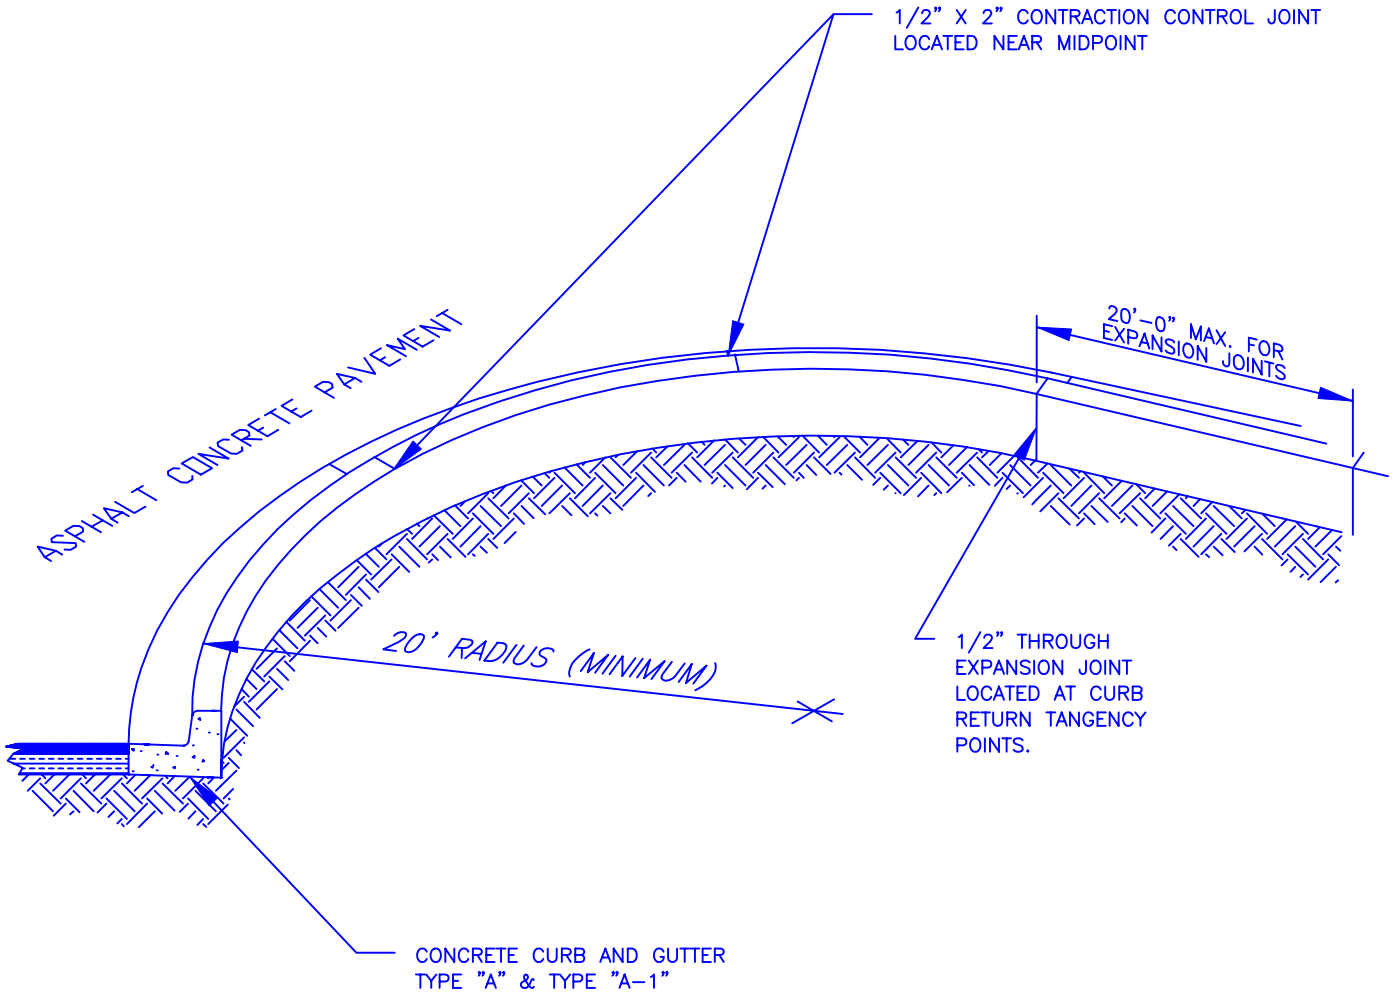

NOTES:

JOINTS – AS SHOWN OR AS DIRECTED BY ENGINEER. THROUGH JOINTS IN CURB AND GUTTER SHALL MATCH SIDEWALK THROUGH JOINTS.

MATERIALS – CONCRETE SHALL BE AIR ENTRAINED CLASS 3000

* 25 FOOT RADIUS REQUIRED FOR DRIVEWAY WIDTHS LESS THAN 28 FEET.

APPROVED: RICHARD H. BARTHOL		THE CITY OF REDMOND WASHINGTON	STANDARD DETAILS
REV. DATE: JULY 1, 2000			**CURB RETURN DRIVEWAY**
ENGINEERING DIVISION			FILE SD908.DWG DRAWING NO. **308**